




WIDOPAN Stone carpet

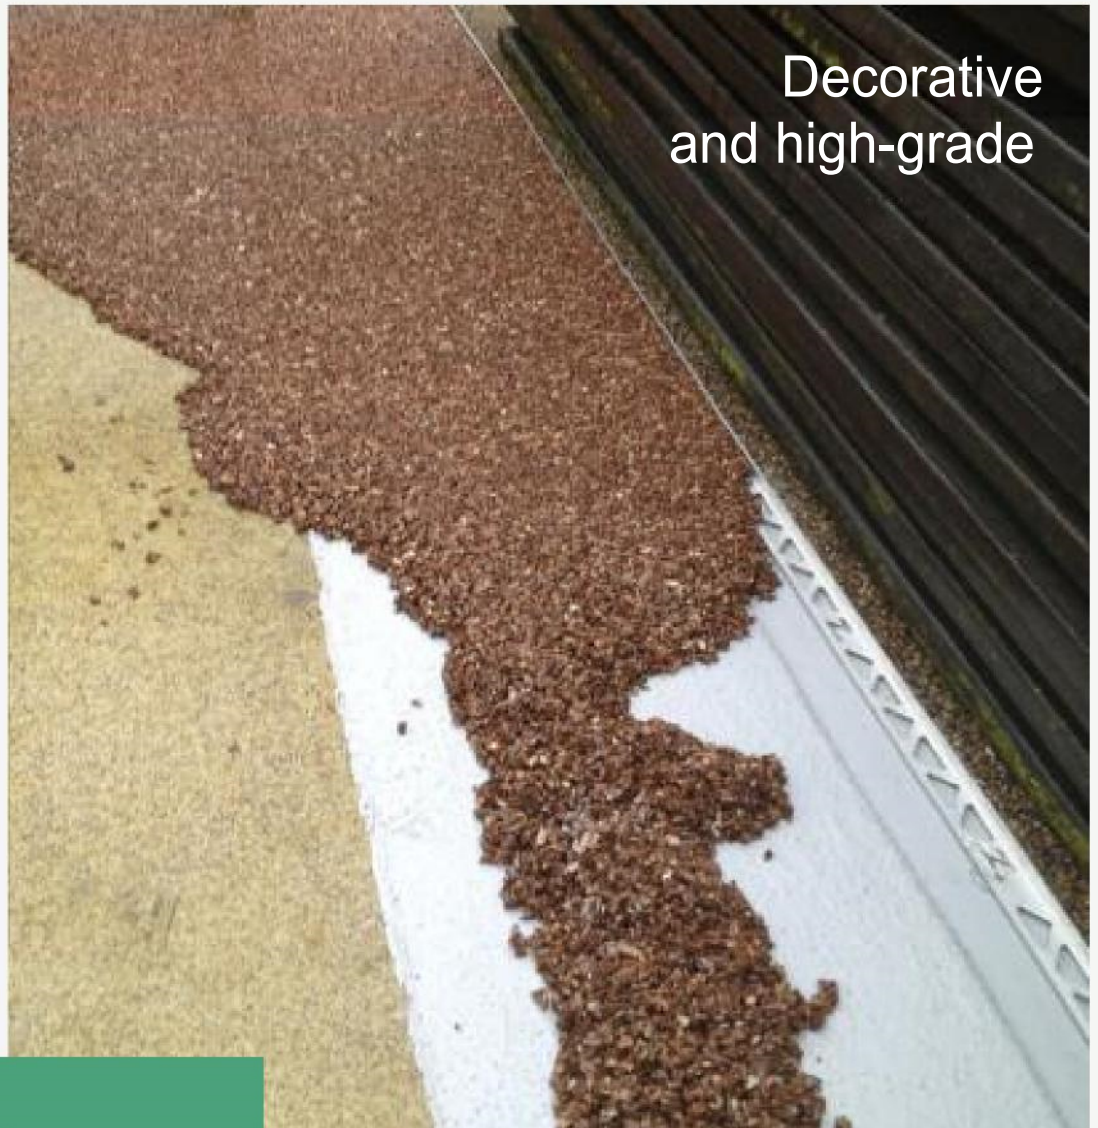

The WIDOPAN Stone carpet is a high-grade alternative to all coatings and can be used on all WIDOPAN liquid plastic sealings.

More than 30 years of success and efficiency in reconstruction and rehabilitation



The WIDOPAN Stone carpet is a jointless and open-pored floor covering for both the interior and exterior zones. The stone carpet consists of natural marble grit and a transparent binding agent. The open-pored structure is sound-absorbing, and the marble pebbles provide a comfortable and safe sensation for walking.

Stone carpet made of marble grit and 1K-PU binding agent

The following tools and working appliances are required for stone carpet production:

- Mixing drum
- Distance spreading knife for homogeneous dispensation
- Smoothing trowel for laying and compacting
- Mixing blunger for mixing the binding agent with the marble grit
- Work gloves

In order to fully prepare the mixture, 25 kg of marble grit (1 sack), of grit size 1-4mm, are mixed with 2 kg "Binding agent for stone carpet" (1K-PU). This corresponds to a binding agent contingent of 8%. The mixture is spread flat onto the floor using either a distance or a screed spreading knife and is transferred homogeneously to all corners. The two distance pins on the side of the spreading knife guarantee a homogenous application. The surface is compacted and smoothed using uniform pressure application by a smoothing trowel.

Notice

In order to spread and smooth the mixture, first cant the trowel and work only with its edge. When compacting, use the flat side of the trowel as much as possible. The best results are achieved when the trowel lies completely flat.

To prevent the adhesion of the applied marble grit onto the trowel, moisten the underpart with "Pril water".

Usage

For a layer thickness of approx. 8 mm, ca. 16 kg/m² of the finished mixture is necessary. The side bounds are best set using Schlüter racks which can be glued using hot glue from a hot glue gun or an adhesive from a cartridge in such a manner, that water can still escape underneath the profile.



Liquid plastic for rehabilitation and reconstruction

Joint sealing Flat roof
Balcony Terrace
Pergola
Parking level
Detail connections

WIDOPAN Produkte GmbH
Ostereichen 3
21714 Hammah
Telephone +49 4144 69821-0
Telefax +49 4144 69821-20
kontakt@widopan.de

